




August 17, 2021

Dear Resident of Sunbreaker Cove,

Pidherney's has been informed that you have elected to have Pidherney's drill your sanitary service past your property line and in the vicinity of your septic tank. Service installations are underway with a second service crew starting on the east end of Fox Crescent the week of August 23<sup>rd</sup> moving east to west through the Summer Village. Updated schedule attached and can also be found on the Summer Village website shortly.

If lot logistics allow, our equipment set up will generally follow the diagram below:

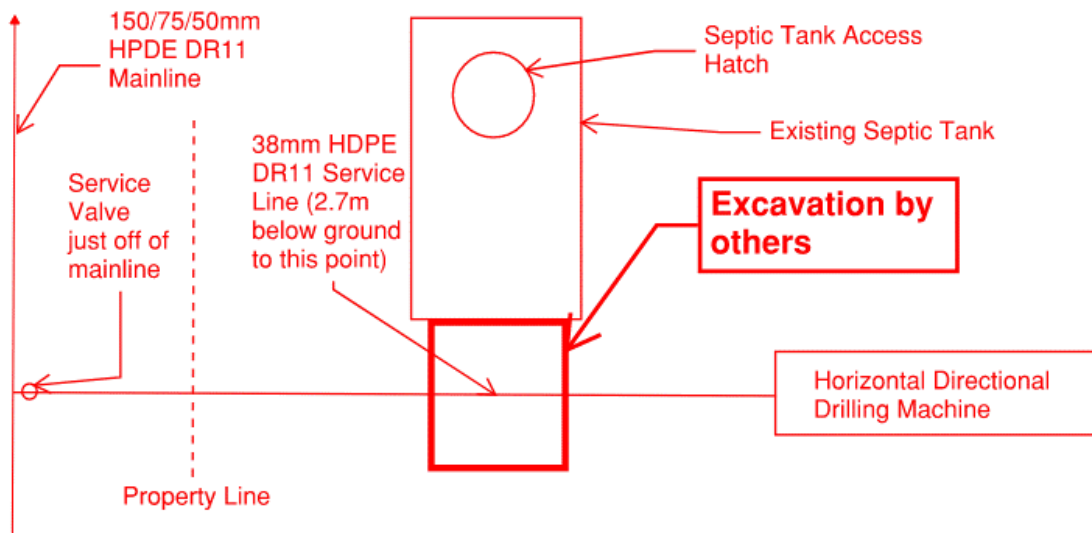

We ask landowners to remove hardscape materials around their tanks to facilitate the installation of the service line. Any concerns pertaining to disruption of surface features (i.e. concrete driveways, sheds/garages, decks, potted plants) please call Ben Fahlman, Project Manager at 403-322-0027. We can review what will be required prior to our arrival to ensure we bring your line as close as safely possible to your tank.

For the best installation location of your service line, Pidherney's suggests landowners contact their plumbing contractor in advance of our arrival to excavate pits at their tanks. If pit excavation is not completed prior to our arrival, Pidherney's will strive to install the service line as close to the tank as possible at depth, however site limitations will dictate how close the line can be brought safely to your tank.

If you have any questions or concerns, please call. Thank you for your patience during these interruptions.

Yours truly,

PIDHERNEY'S



100 - 4900 50th Street  
Deer AB Canada T4N 1X7  
Tel. 403.341.3320  
www.stantec.com

el. 403.341.3320  
www.stantec.com

el. 403.341.3320  
www.stantec.com

el. 403.341.3320  
www.stantec.com

Copyright Reserved

The Contractor shall verify and be responsible for all dimensions. DO NOT scale the drawing - any errors or omissions shall be reported to Stantec without delay.

The Copyrights to all designs and drawings are the property of Stantec. Reproduction or use for any purpose other than that authorized by Stantec is forbidden.

Legend

1. EXISTING SEPTIC TANK
2. EXISTING SEPTIC TANK WITH DEFERRED SERVICE CONNECTION
3. EXISTING WATER WELL
4. CC VALVE

## Notes

- EXACT LOCATIONS OF SANITARY SERVICE CONNECTION NEED TO BE DETERMINED IN THE FIELD AND IS THE RESPONSIBILITY OF THE CONTRACTOR TO LOCATE. SERVICE LINE SHOWN IS ONLY INDICATIVE. ROAD TO BE REPLACED PER DETAIL 1/D02. DIMENSIONS OF SANITARY SERVICE LINES ARE FROM PROPERTY LINE TO ANTICIPATED TANK LOCATION.

revision	by	Appd	Y.M.M.D
ISSUED FOR CONSTRUCTION	B.H.		2021.05.18
	J.M.		
	B.H.		2020.12.08
	A.P.		2016.10.04
	A.P.		2011.08.29
ISSUED FOR PRELIMINARY DISCUSSIONS	J.M.		2011.08.06
	B.H.		
ISSUED FOR PRELIMINARY DISCUSSIONS	By		
	Appd	Y.M.M.D	

File Name:	29451c-002.dwg				
Dwn.	Chkd.	Dsgn.	Yr.Mm.Dd		



## SANITARY SERVICE SYSTEM

## Summer Village Of Sunbreaker Cove

title

CIVIL  
OVERALL PLAN EAST

Project No. 113929451

Scale 0 12.5 25 62.5  
1:1250